

Open Air Merchandisers

HORIZONTAL / 35" DEEP / SHORT

EOMH SERIES



EOMH-36-W-35-S



EOMH-36-B-35-S



EOMH-48-W-35-S



EOMH-48-B-35-S



EOMH-60-W-35-S



EOMH-60-B-35-S



EOMH-72-W-35-S



EOMH-72-B-35-S

Cabinet Construction

- Black or white modern exterior has moisture-resistant panels and field-replaceable tempered glass.
- Heavy-duty stainless steel interior has perforated back wall for efficient air flow. Includes floor drains for ease of cleaning.
- Front stainless steel bumper belt protects against shopping cart impact.
- Galvanized steel top, bottom and rear.
- 2.5" thick high-density polyurethane insulation.
- Integrated retractable night curtain saves energy and provides security.
- 5" swivel casters with locks on front set. Leg stabilizers included.

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air intake and rear air discharge design allows side by side installation.
- Electronically commutated (ECM) evaporator fan motors achieve rapid cooling with less energy consumption.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-20P.

Lighting

- Shielded LED bar lighting under shelves and canopy provide bright, high color illumination at lower heat output. On/off switch saves energy.

Shelving

- Removable 2-tier stainless steel shelf riser.






Temperature Control

- Factory preset temperature of 35°F maintains a combined average product temperature of 40°F or less.
- Audible overheat protection alarm for compressor and condenser coil.

Recommended Operating Conditions





- Conforms to NSF standard 7 TYPE II designed to operate in an air-conditioned environment where temperature and humidity do not exceed 80°F and 55% respectively.
- Must not be installed near ventilation systems, fans or exterior doors or windows that will disrupt the air curtain.
- Must not be installed in direct sunlight.
- In built-in applications, a distance of 6" is required on the front, back and top exterior for ventilation purposes.

↔ = Interior Dimensions ← → = Exterior Dimensions

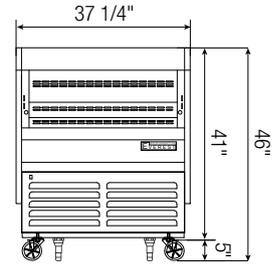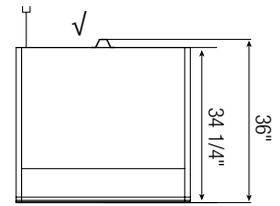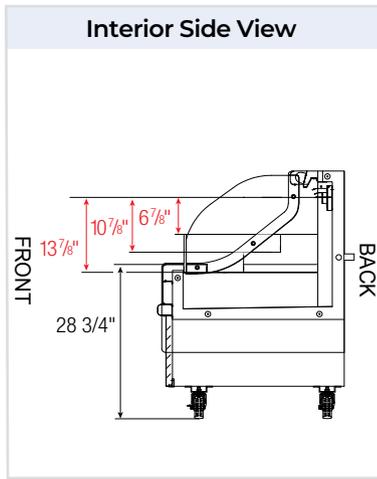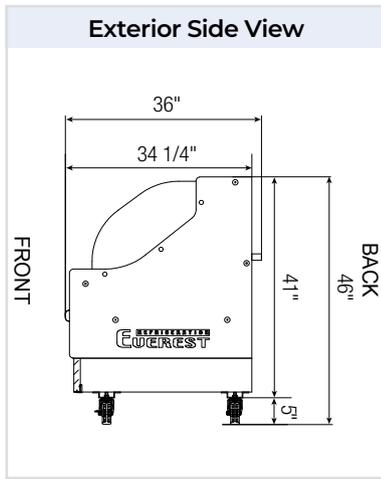


EOMH-36-W(B)-35-S


⏏ : Power Cord 5-20P Equipped with 9 ft long NEMA 5-20P.

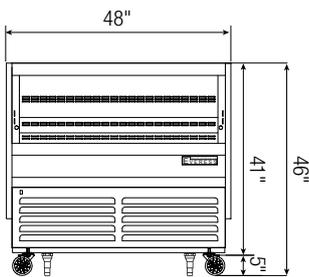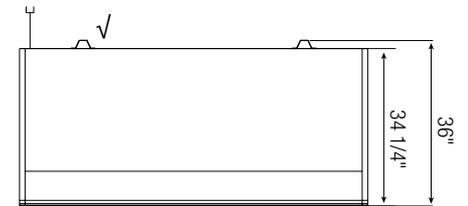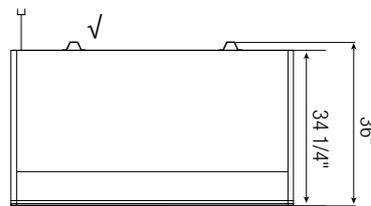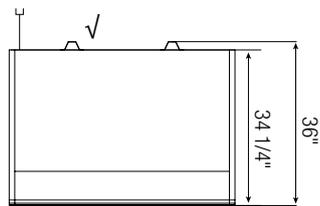

EOMH-48-W(B)-35-S

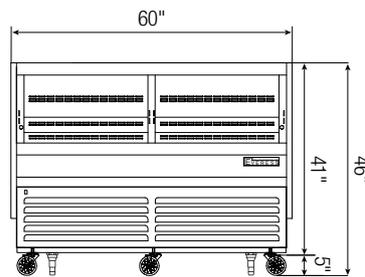

EOMH-60-W(B)-35-S

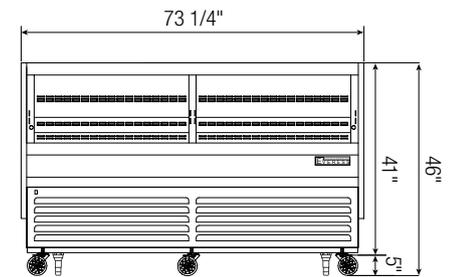

EOMH-72-W(B)-35-S

Model	Ref/ Frz/ Dual	Capacity [†] (Cu. Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	NEMA Config.	Crated Weight (LBS)	Exterior Dimensions (Inches)		
										L	D	H*
EOMH-36-W(B)-35-S	Ref	6	1/2	R290	0	115-60-1	7	5-20P	445	37 1/4	34 1/4	41
EOMH-48-W(B)-35-S	Ref	7	3/4	R290	0	115-60-1	7.5	5-20P	531	48	34 1/4	41
EOMH-60-W(B)-35-S	Ref	9	1/2x2	R290	0	115-60-1	10	5-20P	644	60	34 1/4	41
EOMH-72-W(B)-35-S	Ref	11	3/4x2	R290	0	115-60-1	10	5-20P	750	73 1/4	34 1/4	41

* Height does not include 5" for casters.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (†) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.